



- Small dimensions
- 4-digit LED-indication
- 2 programmable relays
- Output: 4 to 20 mA
- Easy installation
- Overrange up to 750 mbar
- Easy programmable



KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, CANADA, CHILE, CHINA, COLOMBIA,
 CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, INDIA, IRAN, INDONESIA,
 ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, SINGAPORE,
 SLOVAKIA, SPAIN, SWITZERLAND, THAILAND, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH
 Nordring 22-24
 D-65719 Hofheim/Ts.
 ☎ +49(0)6192 299-0
 Fax +49(0)6192 23398
 E-Mail: info.de@kobold.com
 Internet: www.kobold.com

Model:
 PMP



Description

The differential pressure sensor PMP is used for controlling and measuring the differential pressure of air or non-corrosive gases. It is mainly used for the monitoring of filters or filter cartridges measuring the pressure difference before and after the filter chamber.

Cleaning cycles can be determined by means of the programmable relay. If a predefined differential pressure is reached, the rinsing process can be started e.g. automatically via the solenoid valves, and the second relay produces an alarm if the differential pressure increases further on. Thus, the cleaning cycles can be optimised and considerable quantities of compressed air can be saved.

The differential pressure is shown on a four-digit display. For a remote transmission, a 4-20 mA output signal is provided. The device is controlled by a micro processor. Relay, hysteresis, time delay of the relays and analogue output are freely programmable.

Applications areas


- Chemical industrie
- Tank construction

Technical Details

Range:	0 to 500 mm H ₂ O (50 mbar)
Max. pressure:	750 mbar
Ambient temperature:	-10 to +60 °C
Housing:	Polycarbonate
Pressure connection:	2 hose connectors for pipe 6 x 8 mm
LED-indication:	4-digit, 15 mm high
Supply voltage:	24, 110, 230 V _{AC} 50/60 Hz or 24 V _{DC}
Power input:	max. 4 VA
Max. cable diameter:	2.5 mm ²
2 relays:	max. 230 V _{AC} 0.5 A
Output:	4-20 mA (load max. 500 Ω)
Protection:	IP 65

Order no.:	PMP-1050 E1 D042 (230 V _{AC})
	PMP-1050 E1 D442 (110 V _{AC})
	PMP-1050 E1 D242 (24 V _{AC})
	PMP-1050 E1 D342 (24 V _{DC})

Dimensions

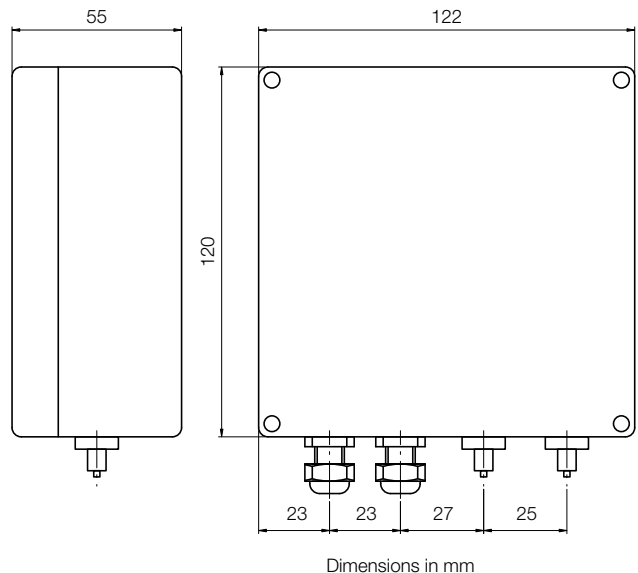

Electrical connection

